10.5 Ton Gooseneck & Pintle Trailer


A Load Warrior® is not just any trailer. Our quality material and components are combined with pride in workmanship. Load Warrior® is the right choice.









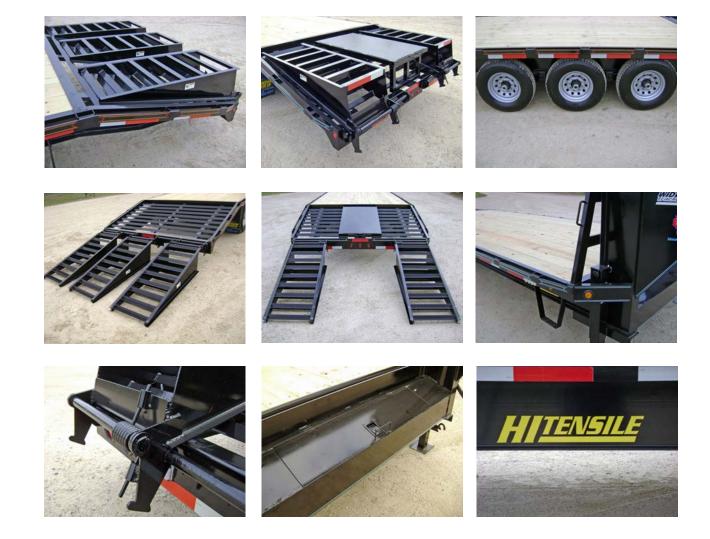

Trailer may be shown with optional equipment. Specifications subject to change without notice.

Specifications - 10.5 Ton Gooseneck Equipment Trailer

Weight Rating: 21,000 LBS. GVWR w/evenly distributed load

Axles: 3 - 7,000# axles, electric brakes w/EZ lube, safety breakaway w/charger

Suspension: 6-leaf slipper springs

Tires & Wheels: ST 235/80 R16 load range E radial tires, 8 X 6.5 bolt pattern silver mod wheels, mud flaps

Hitch: 2 5/16 adjustable gooseneck or pintle, H.D. safety chains

Jack: 2 - 10,000# dropleg

Structural: Hi-tensile 12" X 14# I-beam main frame, 12" X 19# I-beam main frame on 34' and longer, neck uprights are same I-beam as main frame, 10" channel neck, 3" channel crossmembers (18" centers), 5" channel lace rail

Feature: Widened axles and frame extends tires to outside of trailer bed for improved handling and sway control

Dove Tail & Ramps: 5' self cleaning dove tail, w/2 spring assist, double hinged, floor level flip over ramps

Tie Downs: Stake pockets and rub rail

Special Features: Lockable front toolbox, see-thru tubing headache rack, front steps w/grab handles on both sides, spare tire rack in neck

Electrical: All required lighting, sealed beam lights, license light w/bracket, sealed factory wiring harness w/7 way connector, microprismatic reflective tape

Floor: 2 X 8 treated yellow pine decking

Paint: Phosphate etched pretreatment with *Yalspar* high performance primer and acrylic finish

Colors Available: Black, Victory Red, Charcoal Metallic, Arizona Biege, Bright Blue Metallic, Amazon Green, Bright Safety Yellow, Cat Yellow