
## Single Axle Hi-Side Utility Trailer

Fixed solid steel sides with pipe top rail you can tie your load to.



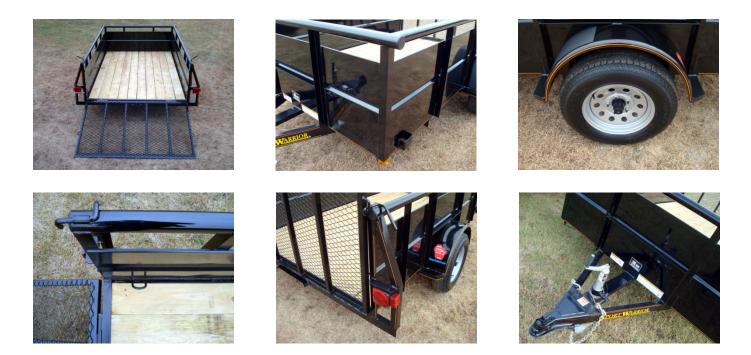

Trailer may be shown with optional equipment.

Specifications - Single Axle Hi-Side Utility Trailer

## Weight Rating: 2,990 LBS. GVWR w/evenly distributed load

Axle: 1- 3,500# w/EZ-lube

**Suspension:** 4 leaf double eye springs

Tires & Wheels: ST205/75 D15 load range C tires, 5x5 bolt pattern silver mod wheels

Fenders: 9"x32" 16 ga. smooth w/stoneguard

Hitch: 2" Atwood A-frame w/safety chains

**Jack:** 2,000# topwind Rapid Jack

Structural: 4" channel tongue, 2 X 3 X 3/16 crossmembers (24" centers), 2 3/8" pipe top rail & 2 X 2 X 3/16" uprights

Tie Downs: 4 tie loops in box

Sides: Pre-formed solid steel panels w/V crimps, 2 3/8" pipe top rail, 30" height overall

Electrical: All required lighting, license bracket w/light, wiring in conduit w/flat 4 way connector

Floor: 2X8 treated yellow pine decking

Paint: Phenolic epoxy ester primer w/acrylic finish

**Colors Available:** Black, Victory Red, Charcoal Metallic, Silver Metallic, Bright Blue Metallic, Emerald Green Metallic, Federal Yellow, Bright Safety Yellow, Safety Orange, (Some custom colors - please call)