

Low Profile Gooseneck Trailer

LOADWARRIOR

Low profile "bed between the tires" makes this trailer the right choice for hauling pickups, cars, equipment or anything where a lower bed height is desired.

Epoxy Primer
w/Acrylic Finish

LED Lights &
Sealed Wiring
Harness

EZ Lube Hubs


Gooseneck or
Bumper Hitch
Available



Johnson Trailer Co.

E7290 State Rd. 170
Colfax, WI 54730
715-962-3277

www.JohnsonTrailerCo.com

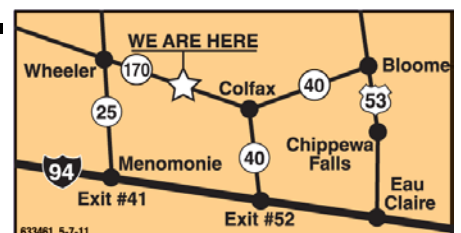



Trailer may be shown with optional equipment. Specifications subject to change without notice.

Specifications - Low Profile Gooseneck

Weight Rating: 14,000 LBS. GVWR or 20,000 LBS. GVWR w/evenly distributed load

Axles: 2 - 7,000# electric brakes, w/EZ-lube, safety breakaway w/charger

Suspension: 7 leaf slipper springs

Tires & Wheels: ST235/80 R16 load range E radial tires, 8x6.5 bolt pattern silver mod wheels

Fenders: 9"x72" 16 ga. smooth teardrop w/stoneguard, 9"x108" 16 ga. smooth teardrop w/stoneguard

Jack: 10,000# dropleg

Hitch: 2 5/16 adjustable gooseneck or pintle, H.D. safety chains

Structural: 8" channel frame & neck, 3" channel crossmembers (16" centers), 38' & 40' have 10" channel frame & neck

Tie Downs: Stake pockets on 24" centers

Special Features: Chain tray, lockable chain & binder rack in neck, spare tire mount in neck

Ramps & Dove Tail: For car hauling trailers: 80" X 16", 2X2 tubing ramps w/mesh grip, rear slide-in. 60" tapered frame dovetail. For equipt. type trailers: 5' X 16", 3" channel stand up knee ramps. 32" dove tail

Electrical: LED lights w/mid-turn signals, license bracket w/light, sealed factory wiring harness w/7 way connector, microprismatic reflective tape

Floor: 2 X 8 treated yellow pine decking

Paint: Phosphate etched pre-treatment with epoxy primer and acrylic finish

Colors Available: Black, Victory Red, Charcoal Metallic, Silver Metallic, Bright Blue Metallic, Emerald Green Metallic, Federal Yellow, Bright Safety Yellow, Safety Orange, (Some custom colors - please call)