
## Tandem Axle Hi-Side Utility Trailer



Fixed solid steel sides with pipe top rail you can tie your load to.



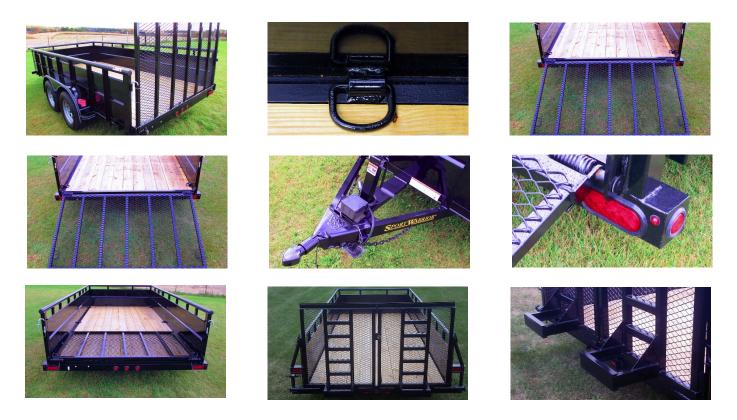

Trailer may be shown with optional equipment. Specifications subject to change without notice.

## Specifications - Tandem Axle Hi-Side Utility Trailer

Weight Rating: 7,000 LBS. GVWR w/evenly distributed load

Axles: 2- 3,500# electric brakes, w/EZ-lube, safety breakaway w/charger

Suspension: 4 leaf double eye springs

Tires & Wheels: ST205/75 D15 load range C tires, 5x5 bolt pattern silver mod wheels

Fenders: 9"x72" 16 ga. smooth teardrop w/stoneguard

Hitch: 25/16" Bulldog w/safety chains

Jack: 7,000# dropleg jack

Structural: 5" channel tongue, 2 X 3 X 3/16 crossmembers (24" centers), 2 3/8" pipe top rail & 2 X 2 X 3/16" uprights

**Tie Downs:** 4 tie loops in box

Sides: Pre-formed solid steel panels w/V crimps, 2 3/8" pipe top rail, 30" height overall

Electrical: LED lighting, license bracket w/light, wiring in conduit w/7 way connector

Floor: 2X8 treated yellow pine decking

Paint: Phosphate etched pre-treatment with epoxy primer and acrylic finish

**Colors Available:** Black, Victory Red, Charcoal Metallic, Silver Metallic, Bright Blue Metallic, Emerald Green Metallic, Federal Yellow, Bright Safety Yellow, Safety Orange, (Some custom colors - please call)